

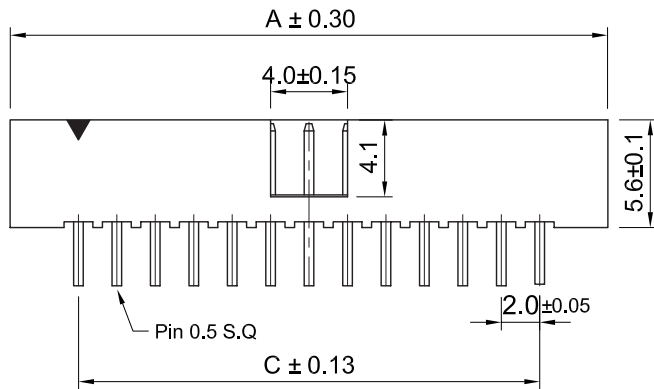


Recommended  
P.C.Board Hole Layout



### Specifications

- Current Rating: 2A
- Insulation Resistance: 1000M ohms / min
- Contact Resistance: 20m ohms max.
- Withstand Voltage: 500V AC
- Temperature Range: -40 ~ +125°C
- Contact Material: Brass
- Insulator Material: Polyester, UL94V-0 Nylon-6T
- Contact Plated: See options
- Standard: Full Gold Flash

### Part Numbering System

**BH2-RD-565428 - XX - X N**

- Series
- No. of Pins
- Contact Plating
- Insulator Material: N = High Temperature Nylon-6T

Contacts	Dimension mm			Contacts	Dimension mm		
	A	B	C		A	B	C
06	13.20	12.10	4.00	30	37.20	36.10	28.00
08	15.20	14.10	6.00	34	41.20	40.10	32.00
10	17.20	16.10	8.00	40	47.20	46.10	38.00
12	19.20	18.10	10.00	44	51.20	50.10	42.00
14	21.20	20.10	12.00	50	57.20	56.10	48.00
16	23.20	22.10	14.00	60	67.20	66.10	58.00
20	27.20	26.10	18.00	64	71.20	70.10	62.00
24	31.20	30.10	22.00	68	75.20	74.10	66.00
26	33.20	32.10	24.00				

* Contact Plating Option	Full Gold Plating	Gold Plated On Contact Area Tin Plated on Solder Area	Full Tin Plating
	G : Gold Flash G10: Gold 10u" G15: Gold 15u" G30: Gold 30u"	S: Gold Flash S10: Gold 10u" S15: Gold 15u" S30: Gold 30u"	T: Tin 100u"

General Tolerance	
X. ± 0.50	X.° ± 5°
.X ± 0.20	.X° ± 2°
.XX ± 0.10	.XX° ± 1°
Units : mm	