


Specifications

- Current Rating: 3A
- Insulation Resistance: 1000M ohms / min
- Contact Resistance: 20m ohms max.
- Withstand Voltage: 500V AC/DC
- Temperature Range: -40°C to +105°C
- Contact Material: Brass
- Insulator Material: PA6T + 30%G.F. (UL94V-0)
- Contact Plated: See options
- Standard: Full Gold Flash

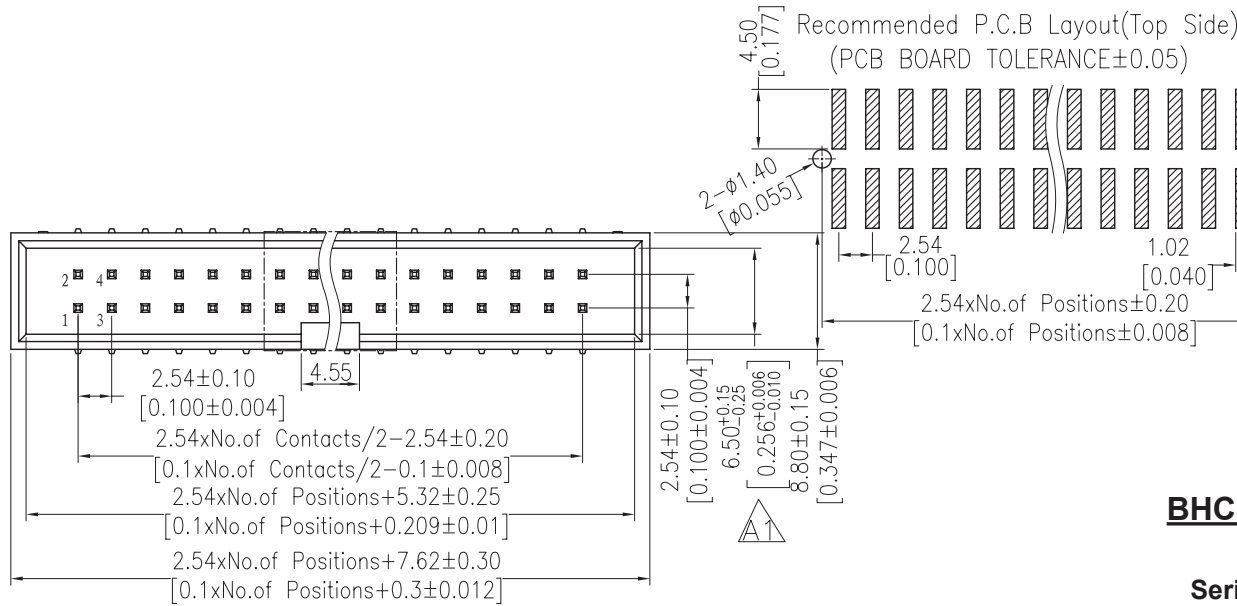

Part Numbering System

BHC-SD-909095 - XX - X X X X X

Series

No. of Pins

Post Option:

Nil = w/o Alignment Pin

A = with Alignment Pin

Contact Plating

Insulator Material:

N = High Temperature Nylon-6T

Packing Method:



B = Tube

T = Tape & Reel

Cap Option:

Nil = No Cap

P = Plastic Cap

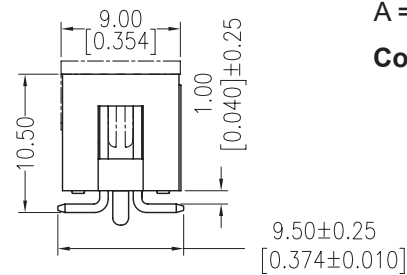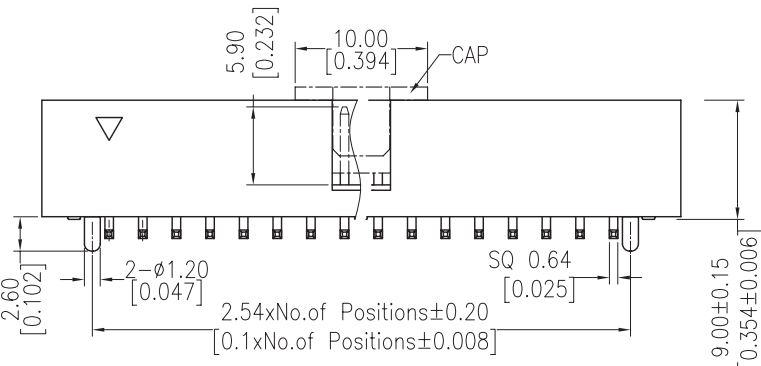

* Contact Plating Option	Full Gold Plating	Gold Plated on Contact Area Tin Plated on Solder Area	Full Tin Plating
	G : Gold Flash G10: Gold 10u" G15: Gold 15u" G30: Gold 30u"	S: Gold Flash S10: Gold 10u" S15: Gold 15u" S30: Gold 30u"	T: Tin 100u"

General Tolerance	
X. ± 0.50	X.° ± 5°
.X ± 0.20	.X° ± 2°
.XX ± 0.10	.XX° ± 1°
Units : mm	