

DCP-252-3 3 PINS DC POWER CONNECTOR SOLDERING TAIL TYPE

SPECIFICATIONS:


Rating: Pin A & B: 20V DC, 7.5A Max. (Pin Dia. 1.5)
 Pin C: 20V DC, 1A Max. (Pin Dia. 1.0)
 Insulation Resistance: 50MOhm Min. at 250V DC
 Dielectric Strength: 250 V AC / 1 Minute

PART NUMBER:

DCP-252-3

MATERIAL:

- ①-Outer Hood: ABS
- ②-Metal Sleeve: Brass, Nickel Plated
- ③-Clamp: Brass, Tin Plated
- ④-Body: PBT
- Pins: Brass, Silver Plated
- ⑤-Plastic Ring: POM
- ⑥-Metal Cover: Brass, Nickel Plated
- ⑦-Coil Spring: Steel
- ⑧-Inner Hood: ABS
- ⑨-Strain Relief: PVC

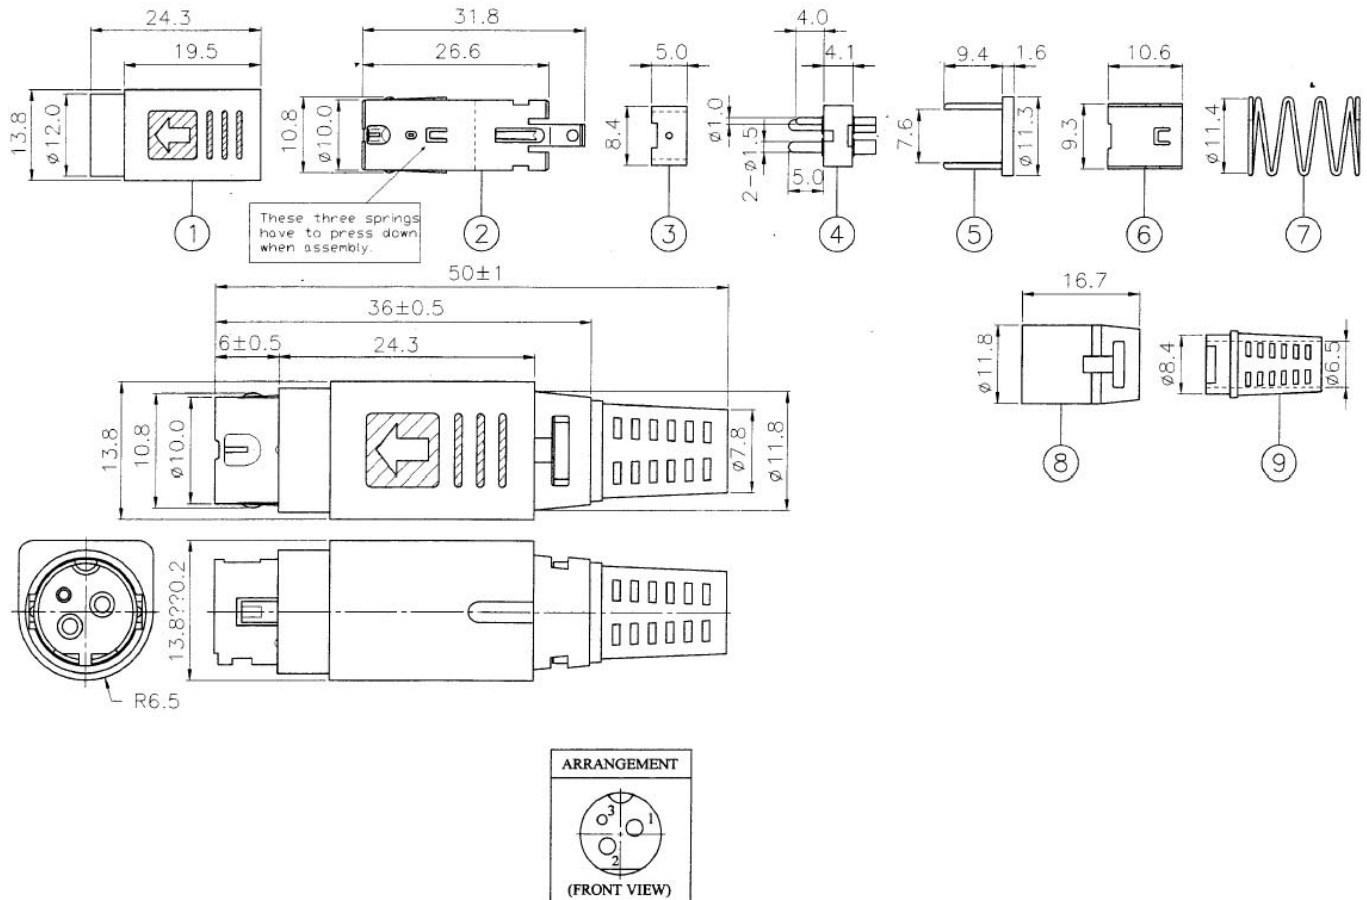

Unless specified, the tolerance is $\pm 0.2\text{mm}$