

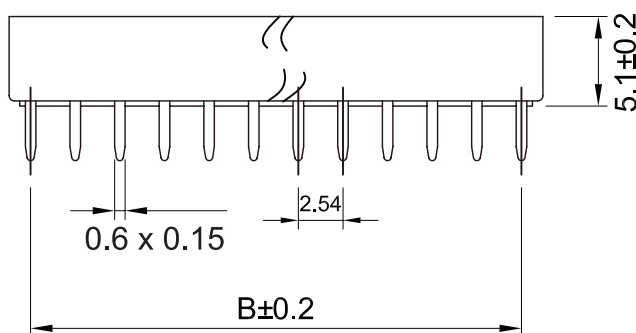
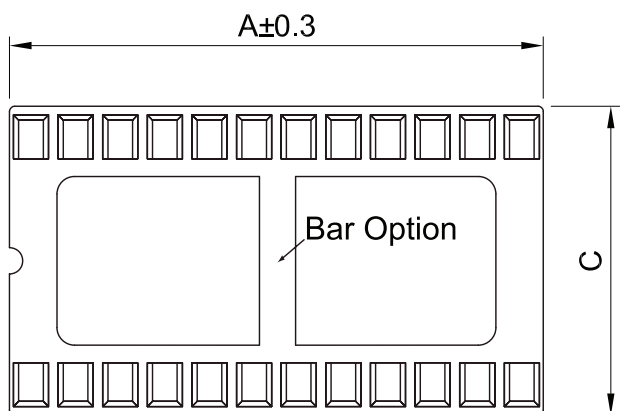


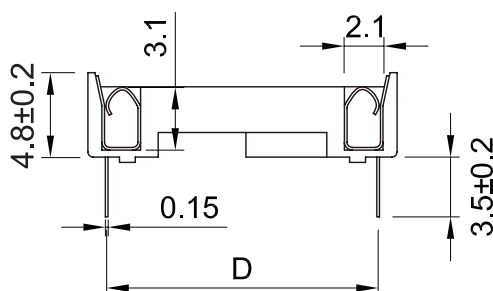

Recommended
P.C. Board Hole Layout



General Tolerance	
X. ± 0.50	X.° ± 5°
.X ± 0.20	.X° ± 2°
.XX ± 0.10	.XX° ± 1°
Units : mm	

Specifications

Current Rating: 1 Amp
 Operating Voltage: 250V AC max.
 Dielectric Withstanding Voltage: 1000V AC for 1 min.
 Insulator Resistance: 5000 Megohms min.
 Contact Resistance: 15 mohms max.
 Operating Temperature: -40°C ~ +105°C
 Contact Material: Phosphor Bronze
 Insulator Material: Polyester, UL 94V-0 P.B.T.
 Contact Plating: Tin Plating

Part Numbering System

Part Number	Contacts	Dimension mm				Bar Option
		A	B	C	D	
I-06	06	7.62	5.08	9.96	7.62 (.3")	without Bar
I-08	08	10.16	7.62			
I-14	14	17.78	15.24			
I-16	16	20.32	17.78			
I-18	18	22.86	20.32			
I-20	20	25.40	22.86			
I-22-.3P	22	27.94	25.40			with Bar
I-24-.3P	24	30.48	27.94			
I-28-.3P	28	35.56	33.02	12.7	10.16 (.4")	without Bar
I-22-.4P	22	27.94	25.40			
I-24-.4P	24	30.48	27.94	17.6	15.24 (.6")	with Bar
I-24-.6P	24	30.48	27.94			
I-28-.6P	28	35.56	33.02			
I-32-.6P	32	40.64	38.10			
I-40-.6P	40	50.80	48.26			
I-42-.6P	42	53.34	50.80			
I-48-.6P	48	60.96	58.42	25.93	22.86 (.9")	
I-64-.9P	64	81.28	78.74			