

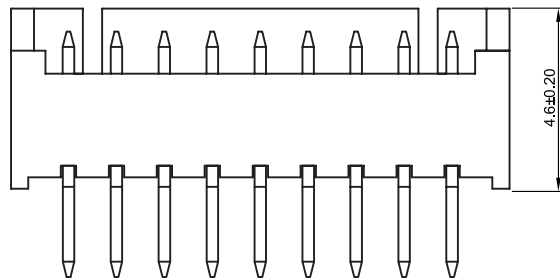
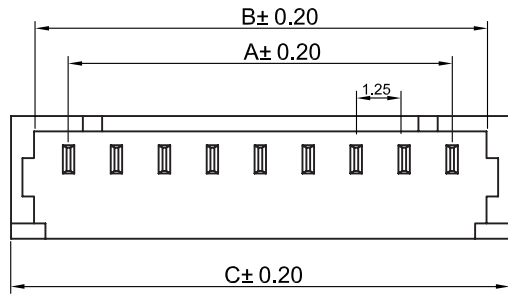


Specifications

Current Rating: 1 Amp
 Operating Temperature : -40°C ~ +125°C
 Contact Resistance: 20 m ohms max.
 Insulation Resistance: 500M ohms min.
 Dielectric Voltage: 500V AC for 1 minute
 Insulator Material: High Temp. Plastic Nylon 46, UL94V-0
 Pin Material: High Strength Brass with Tin over Nickel plated

Recommended P.C. Board Hole Layout

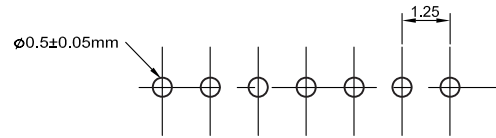

Part Numbering System

W125-1-SS - XX T

Series

of Contact
02 ~ 15

Contact Plating
T = Tin

Contacts	Dimension mm		
	A	B	C
2	1.25	3.15	4.25
3	2.50	4.40	5.50
4	3.75	5.65	6.75
5	5.00	6.90	8.00
6	6.25	8.15	9.25
7	7.50	9.40	10.50
8	8.75	10.65	11.75
9	10.00	11.90	13.00
10	11.25	13.15	14.25
11	12.50	14.4	15.50
12	13.75	15.65	16.75
13	15.00	17.90	18.00
14	16.25	18.15	19.25
15	17.50	19.40	20.50

General Tolerance	
X. ± 0.50	X.° ± 5°
.X ± 0.20	.X° ± 2°
.XX ± 0.10	.XX° ± 1°
Units : mm	